

# 5–12NM Solar Marine Lantern

SL-C500



The SL-C500 is a completely self-contained 5–12NM Solar LED Marine Lantern designed for a range of low-maintenance applications.

The light boasts a large internal battery compartment, a SL-155 Series LED light-head and 4 premium-grade 10 watt solar modules mounted to collect sunlight at all angles.

The SL-C500 is moulded from UV-stabilised, virgin polyethylene, providing enormous impact and weather resistance, in addition to high visibility IALA colours.

The user-friendly, 2-piece design allows the lantern to be opened for convenient battery inspection or replacement whilst the base remains fixed to the supporting structure.

## Advanced PC or IR Programming

Sealite's convenient PC Configuration Tool or IR programmer allows a host of features to be user set including;

- Multiple intensity settings
- 310 flash settings including custom character
- Automatic effective intensity adjustment
- Adjustable on/off lux levels
- Low battery threshold
- GPS synchronisation offset
- Alarm conditions

## Optional GPS Synchronisation

The SL-C500 may be fitted with an optional GPS module for flash synchronisation.

## Optional GSM Monitoring & Control System


The SL-C500 lanterns may also be fitted with a GSM Cell-Phone Monitoring and Control System – enabling users to access real-time diagnostics data and change lantern settings via cell-phone. The system can also be configured to send out alarm SMS text messages to designated cellular telephone numbers. Users can also have alarms and reports sent to designated email addresses.

## Optional Type 1 or Type 3 AIS

The SL-C500 lanterns are available with a class-leading integrated, low-powered Type 1 or Type 3 AIS.

When fitted, the AIS is encapsulated within the body of the SL-155 to maintain the weatherproof integrity.

Note: With integrated AIS, the lanterns visible range may be reduced. Please check the Sealite Solar Calculator for performance characteristics.

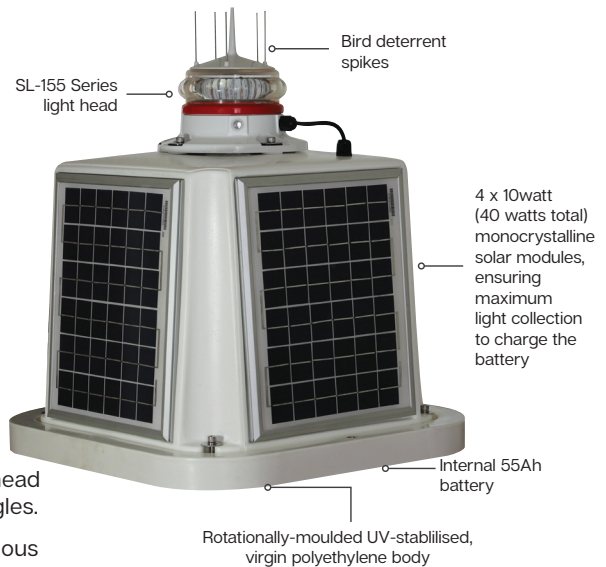

## Reliable

- Up to 12NM visible range
- Multiple lens divergences for fixed or floating applications
- Complete unit – ready for immediate installation
- Impact & weather resistant polyethylene
- PC or IR Programmer for setup, diagnostic & testing


Specifications subject to change or variation without notice  
 ^ Refer to the Sealite website under the warranty section  
 \* Subject to standard terms and conditions  
 † Intensity setting subject to solar availability



## Technical Specifications\*

SL-C500	
<b>Light Characteristics</b>	
Light Source	SL-155-2.5D/5D/10D lantern
Available Colours	Red, Green, White, Yellow
Typical Maximum Intensity (cd)†	Refer to Typical Maximum Intensity Table for SL-155 Series Lanterns
Visible Range (NM)	AT @ 0.74: 5–12 AT @ 0.85: 6.3–17.4
Vertical Divergence (degrees)	2.5, 5 or 10
Horizontal Output (degrees)	360
Available Flash Characteristics	Up to 310 including 256 IALA recommended, & 1 custom
Intensity Adjustments	User adjustable
LED Life Expectancy (hours)	>100,000
<b>Electrical Characteristics</b>	
Current Draw (mA)	Refer to Sealite Power Calculator
Power (W)	Refer to Sealite Power Calculator
Circuit Protection	Polarity protected
Nominal Voltage (VDC)	12
Autonomy (days)	>20 (14 hour darkness, 12.5% duty cycle)
Temperature Range	-40 to 80°C
<b>Solar Characteristics</b>	
Solar Module Type	Monocrystalline
Output (watts)	40 (4 x 10watt)
Charging Regulation	Microprocessor controlled
<b>Power Supply</b>	
Battery Type	Gel SLA
Battery Capacity (Ah)	55
Nominal Voltage (V)	12
<b>Physical Characteristics</b>	
Body Material	Rotationally-moulded UV-stabilised virgin polyethylene
Lens Material	UV-stabilised acrylic
Lens Diameter (mm/inches)	From 171 / 6 3/4
Lens Design	Multi LED Optic
Mounting	4 x 11mm mounting holes
Height (mm/inches)	From 675 / 26 1/2
Width (mm/inches)	560 / 22
Mass (kg/lbs)	From 23 / 50.7
Product Life Expectancy	Up to 12 years
<b>Certifications</b>	
CE	EN61000-6-3:1997. EN61000-6-1:1997
IALA	Signal colours compliant to IALA E-200-1
Quality Assurance	ISO9001:2015
Waterproof	IP68 light-head
<b>Intellectual Property</b>	
Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd
<b>Warranty*</b>	
3-year warranty	
<b>Options Available</b>	
<ul style="list-style-type: none"> <li>• SL-125 Series Lantern</li> <li>• 200mm bolt pattern mounting plate</li> <li>• GPS Synchronisation</li> <li>• AIS Remote Monitoring</li> <li>• GSM Monitoring &amp; Control System</li> <li>• RS232/422/485 Port</li> <li>• General purpose inputs (2) &amp; outputs (2)</li> </ul>	

## Technical Illustration

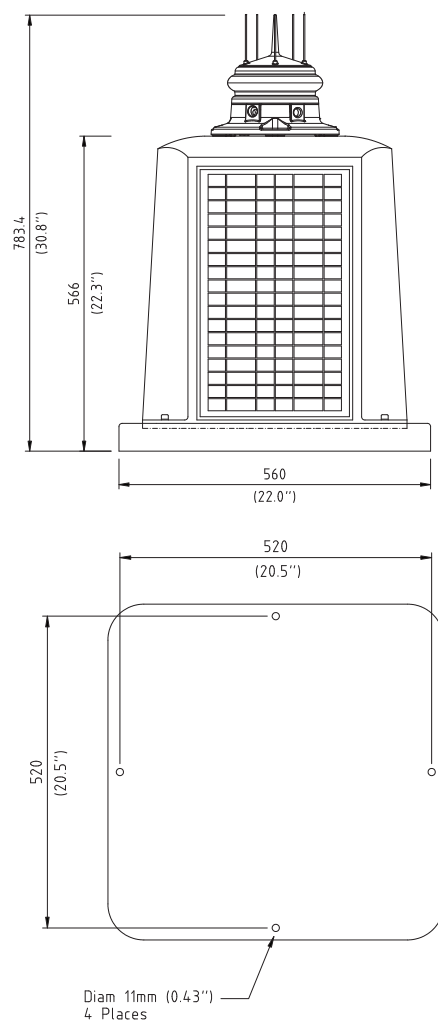

We believe technology improves navigation™



**Sealite Pty Ltd**  
 Australia  
 ☎ +61 (0)3 5977 6128

**Sealite Asia Pte Ltd**  
 Singapore  
 ☎ +65 6829 2243

**Sealite United Kingdom Ltd**  
 UK  
 ☎ +44 (0) 1502 588026

**Sealite USA LLC**  
 USA  
 ☎ +1 (603) 737 1311

