


# SL-B600

600mm dia. Marker Buoy

Sealite have a range of mooring chains & accessories - ask your representative today how we can supply your complete mooring solution

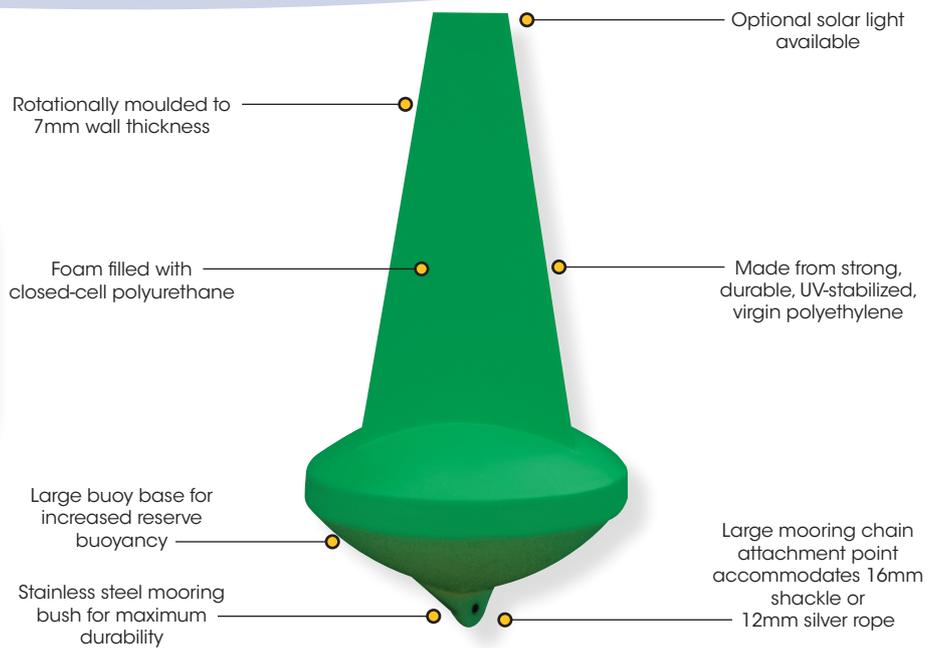

## The Sealite Advantage

- High visibility red, green, white or yellow as per IALA recommendations
- Range of mooring equipment & chain available
- 16mm shackle or 12mm silver rope attachment point
- Excellent buoyancy & stability
- Mould-in graphics to suit customer requirements

Optional Mould-in Graphics Available



SL-B601 has an integrated light mount top section to securely attach Sealite's SL-15 & SL-60 marine lanterns

## The SL-B600 is a short-range buoy ready for immediate installation. Typical applications include day and night channel, speed zone and restricted area marking.

The SL-B600 is extremely long lasting and is moulded from strong, durable, UV-stabilized polyethylene. The large buoy base enables an even greater mooring load, with reserve buoyancy of 26kg (57lbs). The stainless steel mooring bush is moulded directly into the buoy during manufacture for superior durability and strength. A large mooring chain attachment point accommodates a 16mm shackle or 12mm silver rope.

The complete assembly is only 18.5kg (41lbs) and is available in standard high visibility Yellow, Green, Red and White.


Custom mould-in graphics are also available on request.

**Environmentally Friendly & Recyclable**

Sealite buoy products are made from recyclable materials. As a service to customers, individual components and products at the end of their service life may be returned to Sealite for recycling.

# SL-B600

## 600mm dia. Marker Buoy

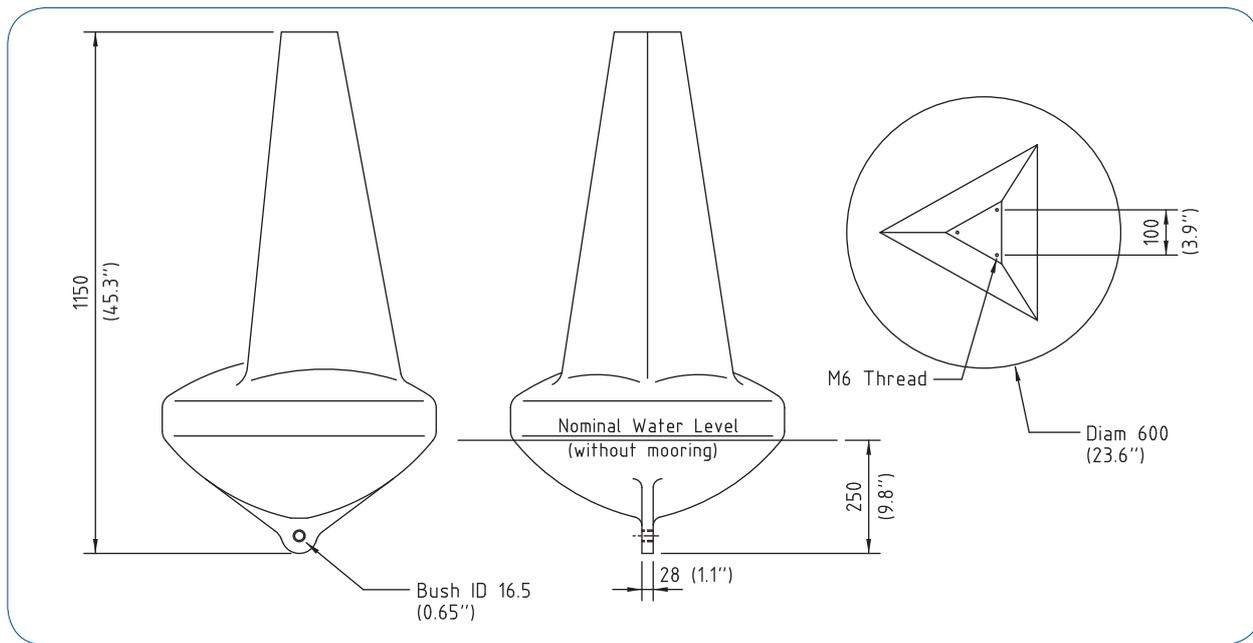

Range of mould-in graphics such as "5 Knots" available

### SPECIFICATIONS \* SL-B600

#### General Characteristics

Available Colours	Red, Green, White, Yellow as per IALA Recommendations
Focal Plane Height (mm/inches)	960 / 37 <sup>3</sup> / <sub>4</sub>
Total Float Volume (ltrs/US gallon)	90 / 24
Nominal Freeboard (mm/inches)	160 / 6 <sup>1</sup> / <sub>3</sub>
Nominal Draft (mm/inches)	250 / 9 <sup>7</sup> / <sub>8</sub>
Reserve Buoyancy (kgs/lbs)	26 / 57
Maximum Mooring Load (kgs/lbs)	26 / 57
Draft, Maximum (mm/inches)	335 / 13 <sup>1</sup> / <sub>8</sub>
Freeboard, Minimum (mm/inches)	70 / 2 <sup>3</sup> / <sub>4</sub>
Submergence (kg/cm, lb/inches)	2.8 / 15.8

#### Physical Characteristics

Material	Rotationally-moulded UV-stabilized virgin polyethylene
Wall Thickness (mm/inches)	7 / 1/4
Ballast (kg/lbs)	6 / 13 internal concrete
Filling	Closed-cell polyurethane foam
Height (mm/inches)	1150 / 45 <sup>1</sup> / <sub>3</sub>
Width (mm/inches)	600 / 23 <sup>5</sup> / <sub>8</sub>
Mass (kg/lbs)	18.5 / 41
Product Life Expectancy	Up to 12 years

#### Certifications

Quality Assurance	ISO9001:2008
-------------------	--------------

#### Intellectual Property

Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd
------------	---

#### Warranty \*

Lantern Options	Sealite SL-15, SL-60 or SL-70 lantern
-----------------	---------------------------------------

#### Options Available

- Mould-in graphics
- Integrated light mount top section (SL-B601)



\* Specifications subject to change or variation without notice  
 \* Subject to standard terms and conditions

