

# SL-B750

750mm dia. Marker Buoy suited to Fast Water

V1\_2014

Sealite have a range of mooring chains & accessories - ask your representative today how we can supply your complete mooring solution


## The Sealite Advantage

- Single piece float
- Complete unit - ready for immediate installation
- Unique design suitable for fast water currents
- High visibility red, green, white or yellow as per IALA recommendations
- 316-grade moulded-in tie bar provides outstanding lifting strength
- Excellent buoyancy & stability



Environmentally Friendly & Recyclable

Sealite buoy products are made from recyclable materials. As a service to customers, individual components and products at the end of their service life may be returned to Sealite for recycling.

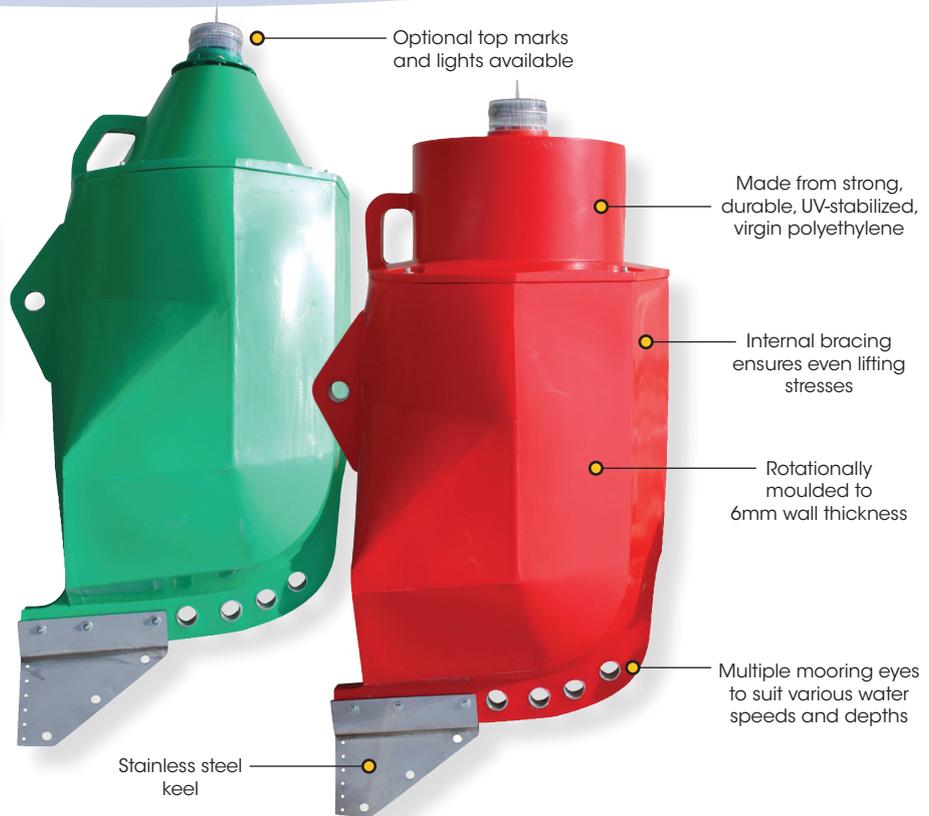

**The Sealite SL-B750 is a large 750mm dia. marker buoy designed for a variety of applications and is particularly suited to fast water currents up to 6 knots.**

The unique, one piece float section has an internally integrated bow and keel which ensures the buoy remains stable during fast currents.


The SL-B750 is rotationally-moulded from UV-stabilized, virgin polyethylene in a range of IALA recommended configurations and colours to ensure clear visibility, and may be fitted with a Sealite LED lantern for safe night navigation.

The SL-B750 has multiple mooring eyes and counterweight mooring points to facilitate correct operation over varying water depths and speeds up to 6 knots.

## 750mm dia. Marker Buoy suited to Fast Water



Stainless steel keel ensures buoy remains stable in faster water currents

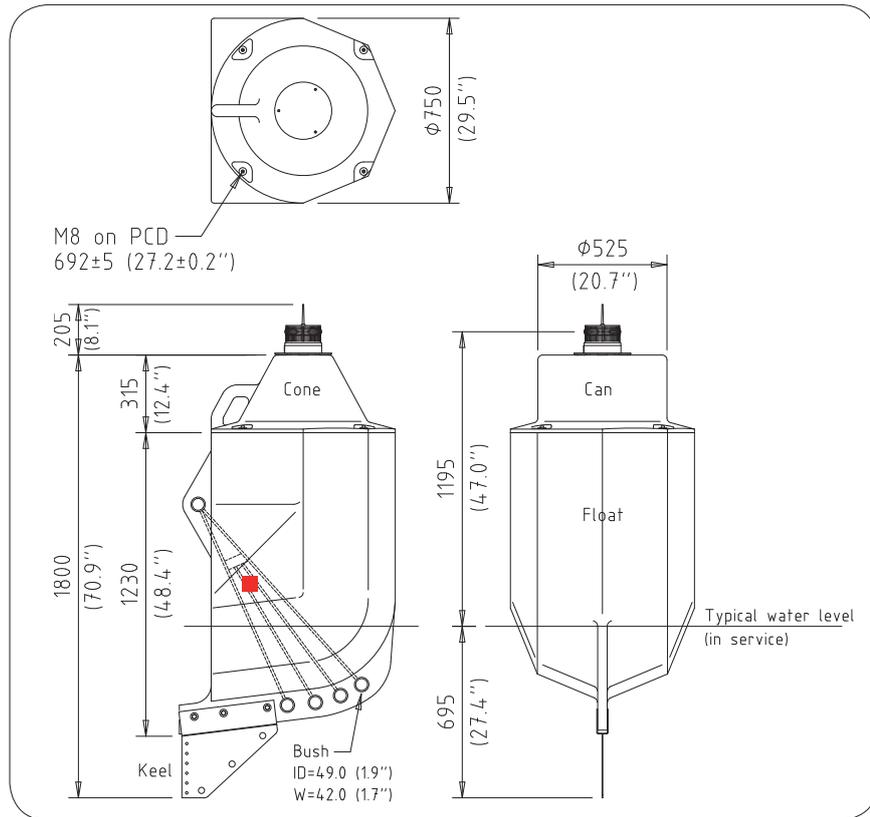

### SPECIFICATIONS \* SL-B750

#### General Characteristics

Available Colours	Red, Green, White, Yellow as per IALA Recommendations
Focal Plane Height (mm/inches)	1195 / 147
Total Float Volume (ltrs/US gallon)	412 / 109
Reserve Buoyancy (kgs/lbs)	24 / 53
Maximum Mooring Load (kgs/lbs)	24 / 53
Draft, Maximum (mm/inches)	695 / 27 <sup>1</sup> / <sub>2</sub>
Freeboard, Minimum (mm/inches)	790 / 31 <sup>1</sup> / <sub>8</sub>
Safe Working Load, 1 pt (kg/lbs)	1000 / 2205

#### Physical Characteristics

Material	Rotationally-moulded UV-stabilized virgin polyethylene
Wall Thickness (mm/inches)	6 / <sup>1</sup> / <sub>4</sub>
Ballast (kg/lbs)	20 / 44
Filling	Closed-cell polyurethane foam (float section)
Height (mm/inches)	2005 / 78 <sup>7</sup> / <sub>8</sub>
Width (mm/inches)	750 / 29 <sup>1</sup> / <sub>2</sub>
Mass (kg/lbs)	64 / 141
Product Life Expectancy	Up to 12 years

#### Certifications

Quality Assurance	ISO9001:2008
-------------------	--------------

#### Intellectual Property

Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd
------------	---

#### Warranty \*

Lantern Options	Sealite SL-15, SL-60 or SL-70 lantern
Options Available	• Mould-in graphics



\* Specifications subject to change or variation without notice  
\* Subject to standard terms and conditions